


# Clear Frost



## Performance Data

Total Solar Energy Reduction	33%
Solar Energy Reflected	19%
Solar Energy Absorbed	22%
Solar Energy Transmittance	59%
Visible Light Transmittance	65%
Visible Light Reflected	25%
Ultra Violet Light Reflected	99%
Shading Coefficient	.78
Solar Heat Gain Coeff. (g Value)	.67
Emissivity	.87
Glare Reduction	28%

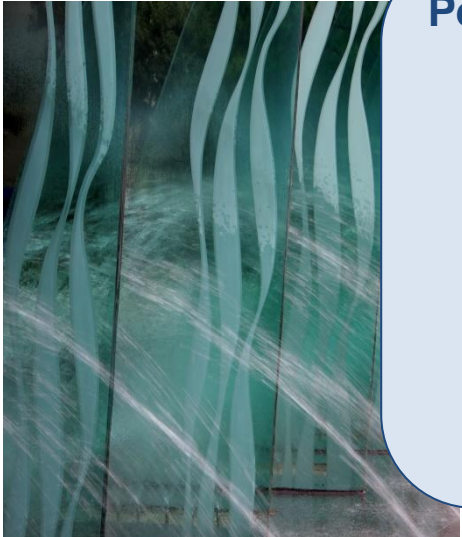

## Performance Guide

Solar Heat Rejection	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
Glare Reduction	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
UV Reduction	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
Fade Reduction	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
Safety & Security	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
One-Way Privacy	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
Two-Way Privacy	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
Scratch Resistance Coating	Yes
Warranty Period	10 Years

Key:

Excellent ☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️    Some Benefit ☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️  
N/A ☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️

## Window Film Notes

An excellent two way privacy film with acid etch appearance, can be cut with company logo or a graphic design.



T: 01428 751004  
E: sales@solarcontrol.co.uk  
W: www.solarcontrol.co.uk