


# DC 15



## Performance Data

Total Solar Energy Reduction	80%
Solar Energy Reflected	52%
Solar Energy Absorbed	38%
Solar Energy Transmittance	10%
Visible Light Transmittance	12%
Visible Light Reflected	25%
Ultra Violet Light Reflected	99%
Shading Coefficient	.25
Solar Heat Gain Coeff. (g Value)	.22
Emissivity	.74
Glare Reduction	86%

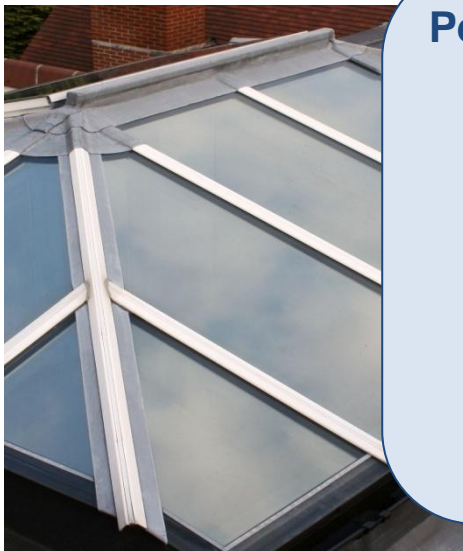

## Performance Guide

Solar Heat Rejection	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
Glare Reduction	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
UV Reduction	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
Fade Reduction	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
Safety & Security	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
One-Way Privacy	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
Two-Way Privacy	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
Scratch Resistance Coating	Yes
Warranty Period	10 Years

Key:

Excellent ☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️    Some Benefit ☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️  
N/A ☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️

## Window Film Notes

An excellent solar heat, glare and one way privacy film. Low internal reflectance, being half that of the external face.



T: 01428 751004  
E: sales@solarcontrol.co.uk  
W: www.solarcontrol.co.uk