


Silver AG 25 Low E



Performance Data

Total Solar Energy Reduction	75%
Solar Energy Reflected	42%
Solar Energy Absorbed	44%
Solar Energy Transmittance	14%
Visible Light Transmittance	22%
Visible Light Reflected	40%
Ultra Violet Light Reflected	99%
Shading Coefficient	.29
Solar Heat Gain Coeff. (g Value)	.25
Emissivity	.33
Glare Reduction	76%

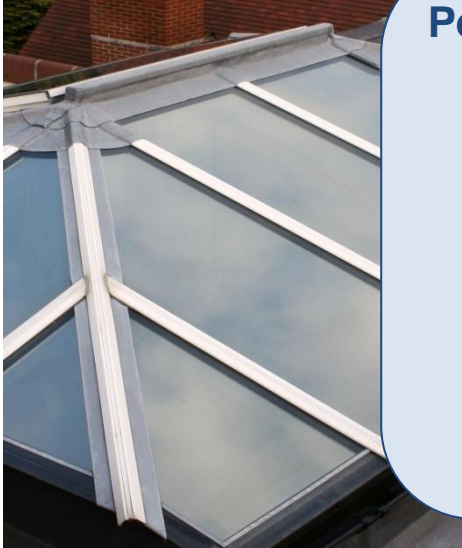

Performance Guide

Solar Heat Rejection	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
Glare Reduction	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
UV Reduction	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
Fade Reduction	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
Safety & Security	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
One-Way Privacy	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
Two-Way Privacy	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
Scratch Resistance Coating	Yes
Warranty Period	10 Years

Key:

Excellent ☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️ Some Benefit ☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
N/A ☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️

Window Film Notes

A specialist low emissivity film to help reduce heat loss through the glass. This film will help increase the thermal insulation of single glazing to the equivalent to a double glazed unit. This solar reflective sputtered film, offers very good solar heat and glare rejection, giving the building a modern mirror appearance.



T: 01428 751004
E: sales@solarcontrol.co.uk
W: www.solarcontrol.co.uk