


Solar Control 40



Performance Data

Total Solar Energy Reduction	63%
Solar Energy Reflected	37%
Solar Energy Absorbed	36%
Solar Energy Transmittance	27%
Visible Light Transmittance	41%
Visible Light Reflected	30%
Ultra Violet Light Reflected	99%
Shading Coefficient	.46
Solar Heat Gain Coeff. (g Value)	.40
Emissivity	.68
Glare Reduction	54%

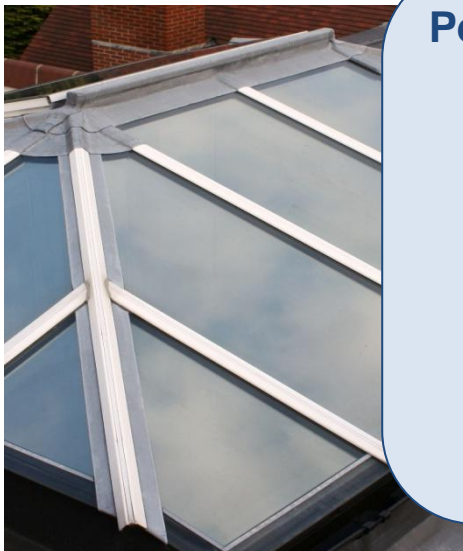

Performance Guide

Solar Heat Rejection	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
Glare Reduction	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
UV Reduction	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
Fade Reduction	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
Safety & Security	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
One-Way Privacy	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
Two-Way Privacy	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
Scratch Resistance Coating	Yes
Warranty Period	10 Years

Key:

Excellent ☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️ Some Benefit ☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
N/A ☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️

Window Film Notes

This spectrally selective film offers very good solar heat, glare and UV protection, allowing very good visible light transmission. This film has a very subtle neutral appearance once installed, giving a low internal reflectance when looking out through the glass.



T: 01428 751004
E: sales@solarcontrol.co.uk
W: www.solarcontrol.co.uk