


Stainless Steel 35 (Light)



Performance Data

Total Solar Energy Reduction	43%
Solar Energy Reflected	13%
Solar Energy Absorbed	49%
Solar Energy Transmittance	38%
Visible Light Transmittance	42%
Visible Light Reflected	15%
Ultra Violet Light Reflected	99%
Shading Coefficient	.65
Solar Heat Gain Coeff. (g Value)	.57
Emissivity	.88
Glare Reduction	53%

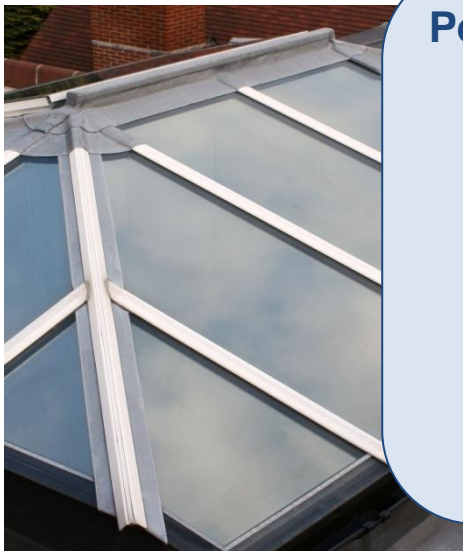

Performance Guide

Solar Heat Rejection	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
Glare Reduction	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
UV Reduction	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
Fade Reduction	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
Safety & Security	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
One-Way Privacy	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
Two-Way Privacy	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
Scratch Resistance Coating	Yes
Warranty Period	10 Years

Key:

Excellent ☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️ Some Benefit ☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
N/A ☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️

Window Film Notes

A neutral grey appearance once installed with good heat and glare rejection.