


Stainless Steel 20 (Dark)



Performance Data

Total Solar Energy Reduction	58%
Solar Energy Reflected	23%
Solar Energy Absorbed	56%
Solar Energy Transmittance	21%
Visible Light Transmittance	23%
Visible Light Reflected	25%
Ultra Violet Light Reflected	99%
Shading Coefficient	.49
Solar Heat Gain Coeff. (g Value)	.42
Emissivity	.84
Glare Reduction	74%

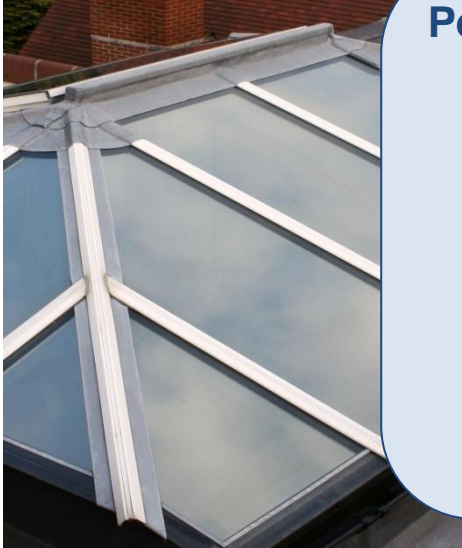

Performance Guide

Solar Heat Rejection	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
Glare Reduction	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
UV Reduction	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
Fade Reduction	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
Safety & Security	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
One-Way Privacy	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
Two-Way Privacy	☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
Scratch Resistance Coating	Yes
Warranty Period	10 Years

Key:

Excellent ☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️ Some Benefit ☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️
N/A ☀️☀️☀️☀️☀️☀️☀️☀️☀️☀️

Window Film Notes

A dark neutral grey appearance once installed with very good heat and glare rejection.